


# MITS **ALTAIR 8800**

## **COMPUTER SYSTEMS BROCHURE**



**A Computer Concept  
Becomes an exciting reality.**

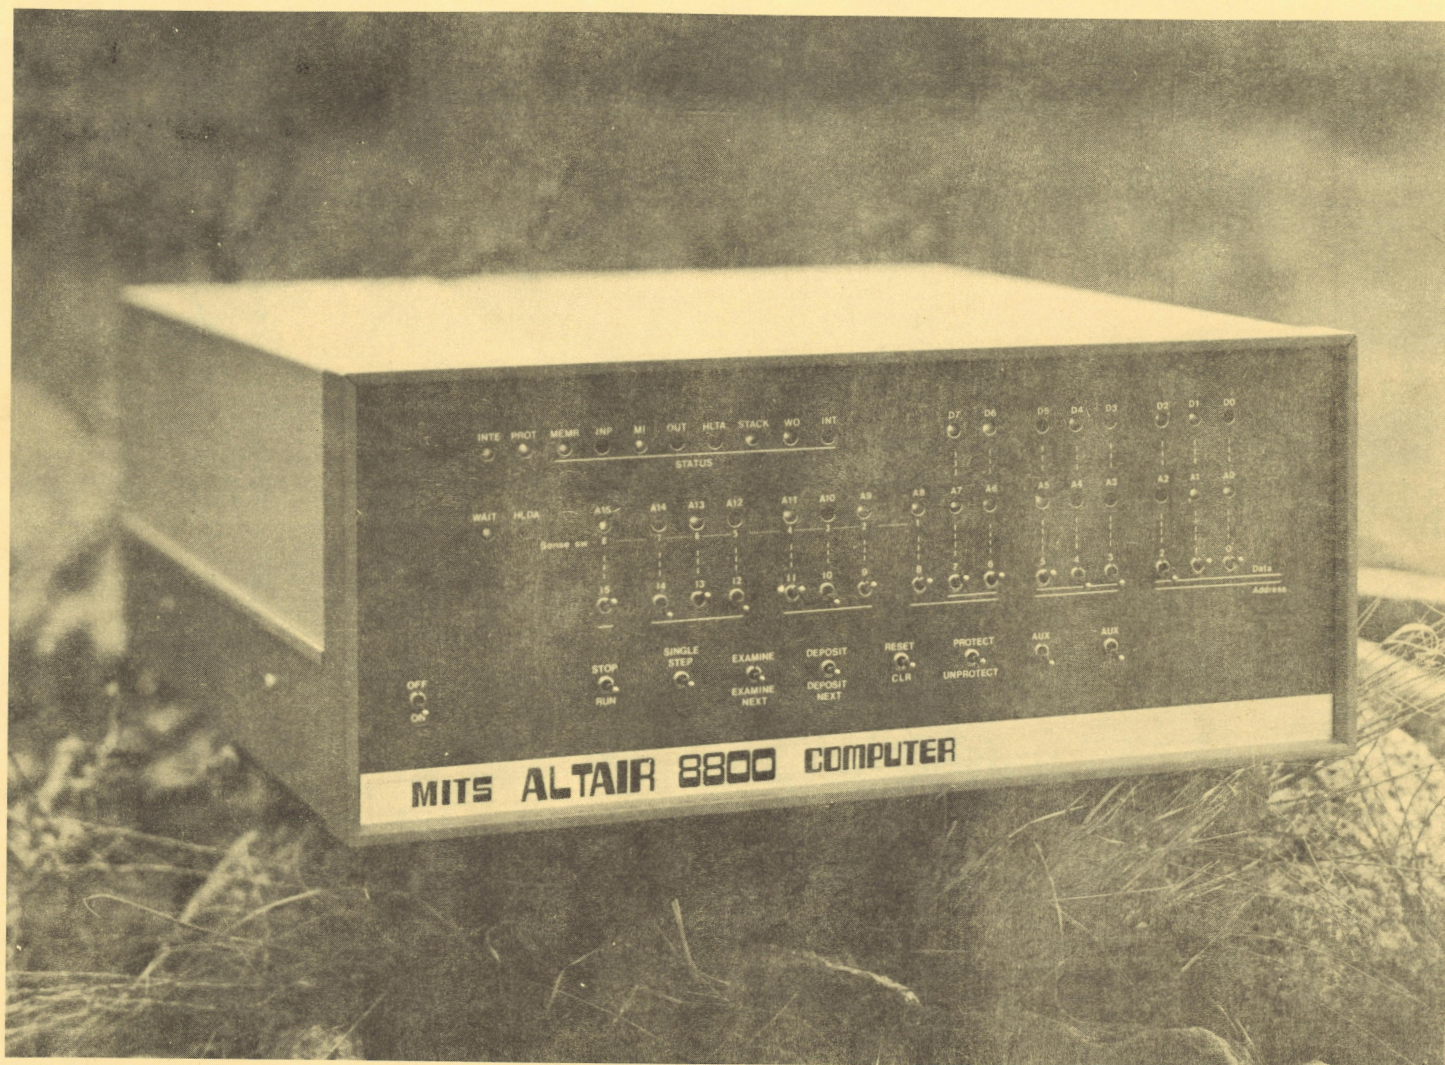

## Contents

Introduction.....	3
Altair Systems.....	5
The Ultimate System.....	7
The Possibilities.....	8
User Applications.....	10
Altair Options.....	11
Processor Description.....	14
Processor Instructions.....	15
Questions & Answers.....	17



Warranty: 90 days on parts and labor for assembled units. 90 days on parts for kits.

Prices, specifications and delivery subject to change without notice.

6328 LINN, N.E., P.O. BOX 8636, ALBUQUERQUE, N.M. 87108

505/265-7553



# PIPE DREAM?

**Not too long ago**, the thought of an honest, full-blown, high-quality computer that sells for less than \$500 would have been considered a mere pipe dream.

Everyone knows that computers are monstrous, box-shaped machines that sell for 10's and 100's of thousands of dollars.

Pipe dream or not, *MITS*, the quality engineering company that pioneered the calculator market, has made the *Altair 8800* a reality. It is the realization of that day when computers are accessible to almost anyone who wants one.

**The heart (and the secret)** of the *MITS Altair 8800* is the *Intel 8080* processor chip. Thanks to rapid advances in integrated circuit technology, this one IC chip can now do what once took thousands of electronic components (including 100's of IC's) and miles of wire.

**Make no mistake about it.** The *MITS Altair 8800* is a lot of brain power. Its parallel, 8-bit processor uses a 16-bit address. It has 78 basic machine instructions with variances up to 200 instructions. That's enough to program all the traffic lights in a major city.

And the *MITS Altair 8800 Computer* is fast. Very fast. Its basic instruction cycle time is 2 microseconds.

Combine this speed and power with the *Altair's* flexibility (it can directly address 256 input and 256 output devices) and you have a computer that's competitive with most mini's on the market today. And sells for a fraction of their cost.



# FLEXIBILITY

The *Altair 8800* has been designed to fulfill a wide variety of computer needs. It is ideal for the hobbyist who wants to get involved with computers. Yet, it has the power and versatility for the most advanced data processing requirements.

You can begin with a basic memory of 256 words of static RAM memory or you can expand the *Altair 8800* to 65,000 words of directly addressable memory. Static or dynamic or PROM or ROM memory. Or a floppy disc system. All supplied by *MITS*.

**Thanks to buss orientation** and standard interface cards provided by *MITS*, the *Altair 8800* requires almost no design changes to connect with most external devices. Any card can be plugged into any slot and the correct address, etc., for that card will be picked up off the buss system.

Since up to 300 peripherals can be added to the *Altair 8800* without any additional buffering, the custom designer can interface to almost any number of imaginable devices simultaneously. All *MITS* peripherals are supplied with software handlers to make interfacing easy.

4

# INDIVIDUAL NEEDS

## **MITS wants to service your individual computer needs.**

You can buy an assembled *Altair 8800*. Or you can start by building the computer yourself. The *MITS Altair 8800* is the ultimate kit. Its assembly isn't much more difficult than assembling a desktop calculator. And it's made double-easy with the aid of a straight-forward, accurate assembly manual.

Or you can start with an *Altair 8800* complete data processing system. *Altair Systems* come in 5 basic configurations.

For those users who are not familiar with computers, *MITS* offers free consultation service. Just describe your requirements to our engineering staff and we will specify the additional cards and the system configuration you need to do the job.

The *MITS Altair 8800* is backed by complete peripheral and software development programs.



# 4 ALTAIR SYSTEMS

## **\*ALTAIR BASIC I**

*Altair 8800 Computer*  
2 4K Dynamic Memory Boards  
Comter II (32-character, self-scan  
display Terminal with built-in  
Audio Cassette Record Interface)  
Serial Input/Output Card  
and Connectors  
Cooling Fan  
BASIC Software

## **\*ALTAIR EXTENDED BASIC II**

*Altair 8800 Computer*  
3 4K Dynamic Memory Boards  
Comter II Terminal  
Serial Input/Output Card  
and Connectors  
Cooling Fan  
Extra Mother Board  
EXTENDED BASIC Software

## **\*ALTAIR DOS/BASIC III**

*Altair 8800 Computer*  
4 4K Dynamic Memory Boards  
Comter II Terminal  
Serial Input/Output Card  
and Connectors  
Cooling Fan  
Extra Mother Board  
Disk Controller  
2 Disk Drives  
EXTENDED BASIC and  
DOS Software

## **ALTAIR EXTENDED Engr/Acctg IV**

*Altair 8800 Computer*  
8 4K Dynamic Memory Boards  
Teletype ASR-33  
Line Printer (110 characters  
per second — includes controller)  
Serial Input/Output Card  
and Connectors  
Cooling Fan  
3 Extra Mother Boards  
Disk Controller  
2 Disk Drives  
EXTENDED BASIC and  
DOS Software

\*Teletype ASR-33 can be substituted for Comter II  
Terminal— See Price List



# Announcing

## the Altair User's Club

### Membership:

Everyone who buys an *Altair Computer* will get a free, one year Membership to the User's Club (including a one year subscription to the Club newsletter).

**Associate Memberships** are available to anyone who does not own an *Altair Computer*. The cost of an Associate Membership is \$30.00 per year.

### Purposes:

1. The development of a comprehensive library of software for the *Altair Computer*. This library will, of course, be made available to all members of the User's Club.
2. Provide *Altair* Users with efficient, *priority* service. This service will range from ordering *Altair* options to free technical consultation.
3. Provide Users with useful, up-to-date information about the *Altair*, *Altair* software, and computers in general through a Club newsletter.

**ALTAIR SOFTWARE PACKAGE ONE**—The first *Altair Software Package* is now available: It includes the following:

1. a resident assembler
2. text editor
3. system monitor

**ADDITIONAL SOFTWARE**—MITS is currently developing comprehensive software for the *Altair Computer*. Included are operating systems and compilers. Purchasers of the *Altair Computer* will be able to purchase this software at a nominal fee.

**Altair manuals**, which come in a 3-ring binder, are constantly being updated and improved. If you wish to receive updates you can order our update service at a cost of \$10.00 per year.



# THE ULTIMATE SYSTEM

The list of options (either available or in development) goes on and on. The five *Altair Systems* are only the beginning. You can buy one of these systems and take advantage of the *Systems' Discount* (see enclosed price list) or you can custom design a system that fits your individual needs.

The *Altair 8800* has very few, if any limitations. You may begin at the "low end" of the data processing scale and over the years wind up with the "ultimate" system.

Using standard *MITS* interface cards, the *Altair 8800* can be connected to *MITS* peripherals (computer terminals, I/O cards, audio-cassette interface, line printers, etc.) to form the core of a sophisticated time-share system.

The *Altair 8800* can be a process controller. It can be an educational device. Or, it can be expanded to be an advanced, custom intrusion system. A programmable scientific calculator. Automatic IC tester. Automated automobile test analyzer. Complete accounting system. "Smart" computer terminal. Sound and light control system.

Or it can be all of these things at the same time. It could be the beginning of new business opportunities. The list of applications is literally endless.


7

## Just think of the possibilities.....




# ALTair 8800

8

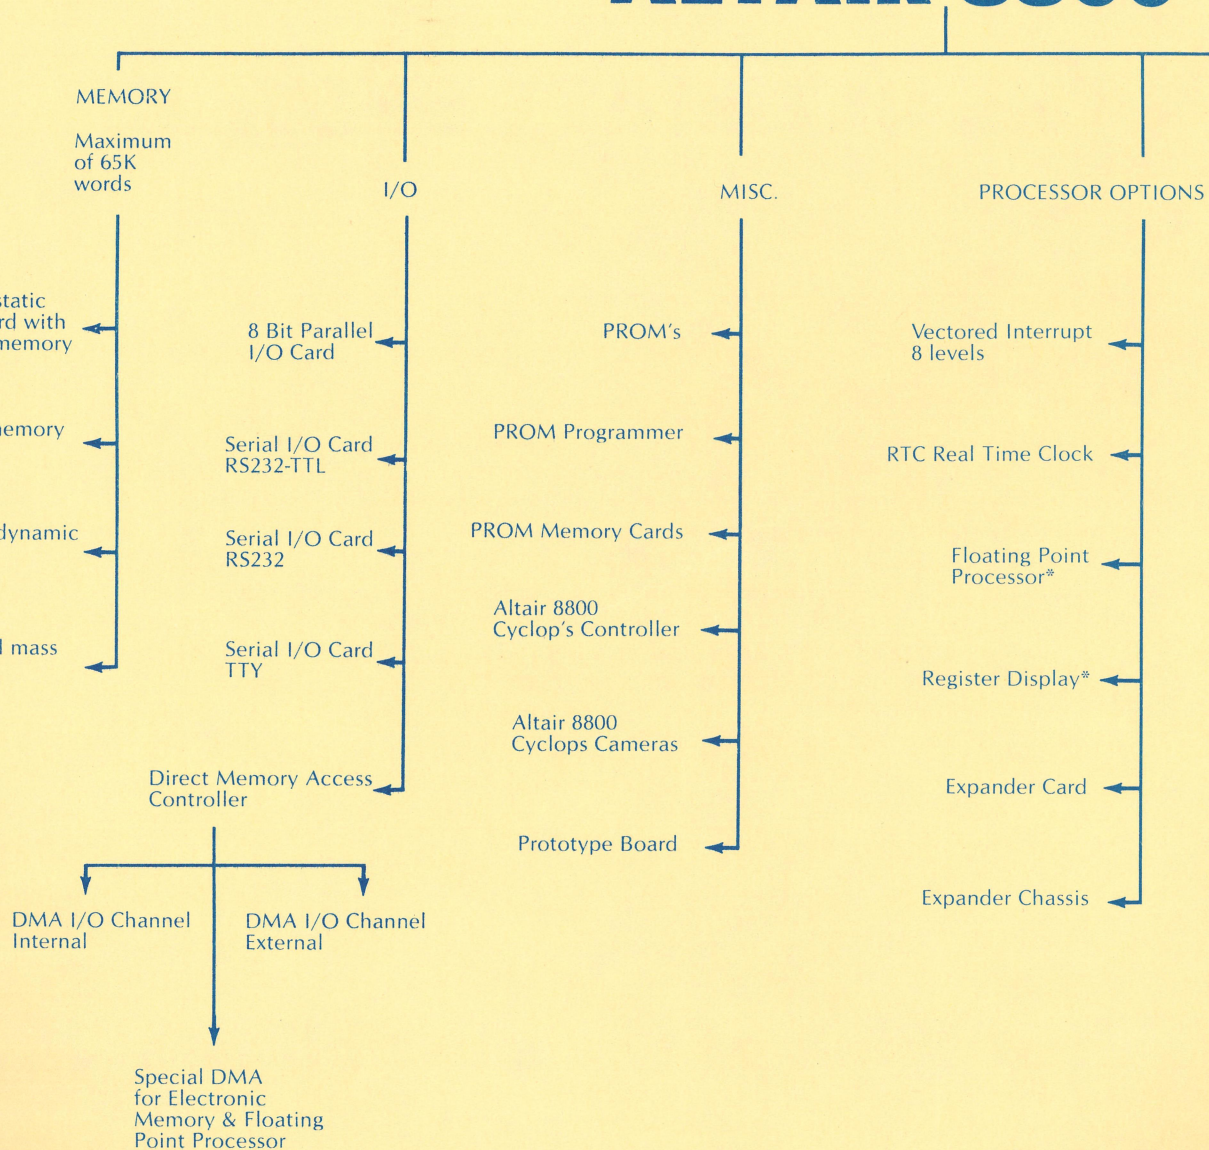



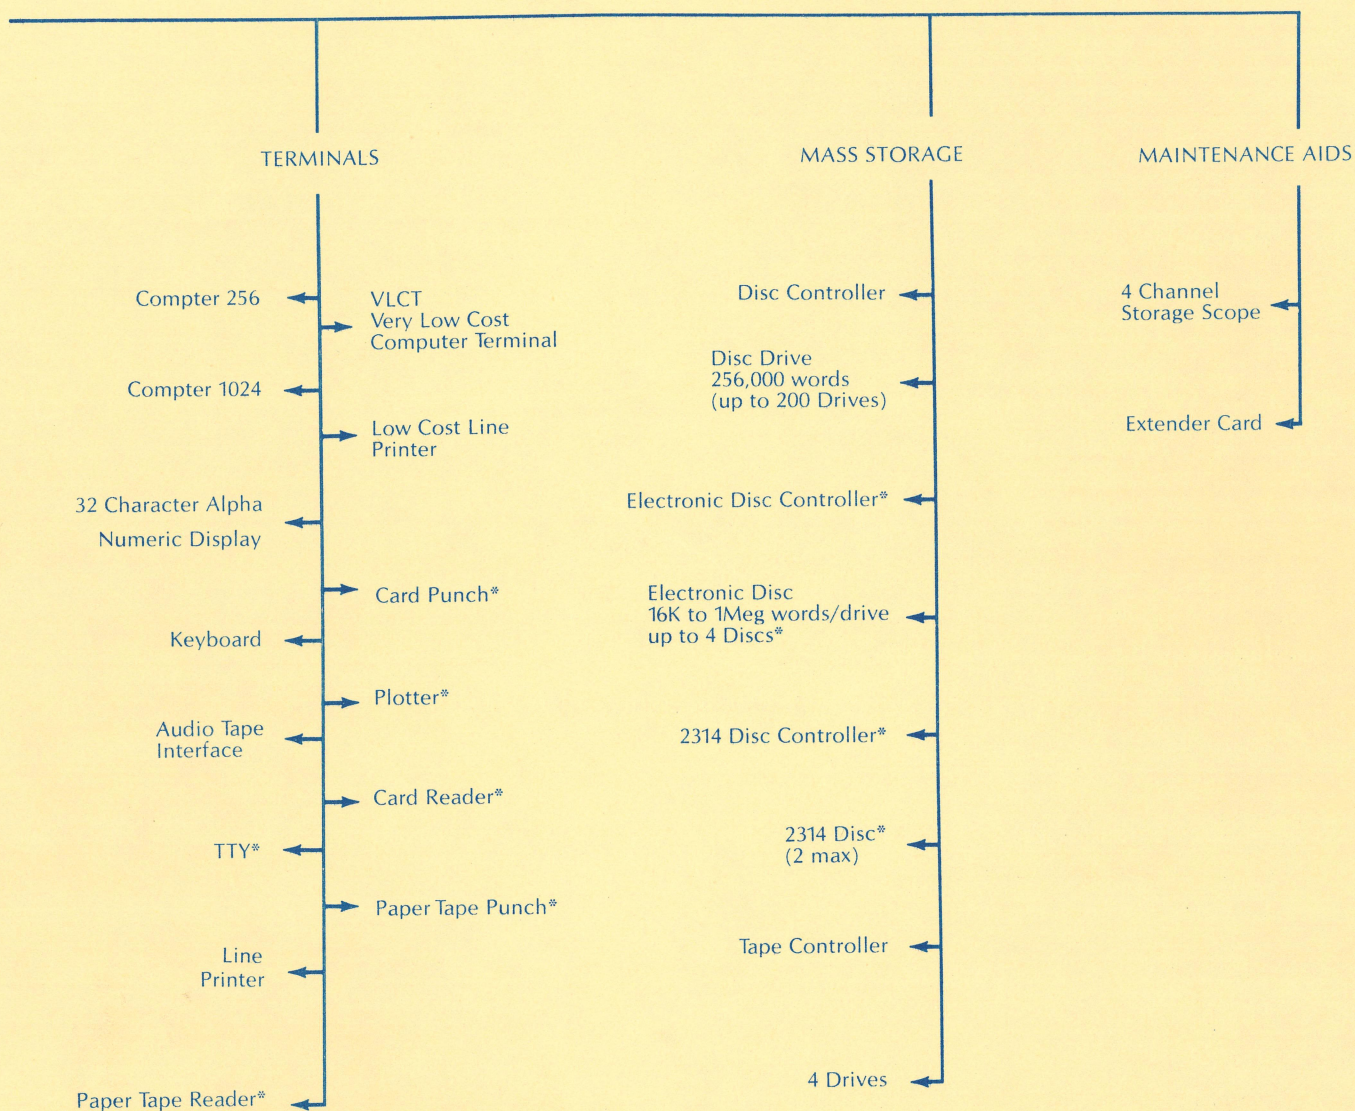

\*In planning stage. All other peripherals are available or are in a development stage.



# POSSIBLE USER APPLICATIONS

(This list is a small % of the possibilities)

programmable scientific calculator  
multichannel data acquisition system  
automatic control for ham station  
sophisticated intrusion alarm system  
automatic IC tester  
machine controller  
digital clock with all time-zone conversion  
high-speed I/O device for large computer  
digital signal generator  
automated automobile test analyzer  
on-board mobile controller  
autopilot for planes, boats, etc.  
navigation computer  
time-share computer system  
"smart" computer terminal  
brain for robot  
pattern-recognition device  
printed matter-to-Braille converter  
automatic drafting machine  
automatic controller for heat, air conditioning, dehumidifying  
controller for sound systems  
digital filter  
signal analyzer  
stock market analysis  
complete accounting system  
    credit card sales  
    cash sales  
    markdowns  
    charge sales  
    gross profit  
    labor costs  
    average cash sale  
    payroll  
    inventory  
    etc.

control applications  
    pumps  
    motors  
    valves  
    set points  
    fans  
    solenoids  
    stepping motors  
    drive contractors  
    etc.



ALTAIR 8800 = 439

# the OPTIONS

NAME & NUMBER	DESCRIPTION	APPLICATION	INTERFACE REQUIREMENT	SPACE REQUIREMENT
88-MCS Static Memory Card	This Static Memory Card comes with 256 words of memory and is expandable to 1024 words. Contains provisions for disabling the ready to compensate for the speed of the card. It also contains memory protect features. The static memory on this card has a maximum access time of 850 nanoseconds.	Systems that require small memory, such as control applications.	none	one slot
88-MM Memory Module	Plugs into the 88C-MCS Memory Card adding 256 words memory. Three modules can be added to each Static Memory Card for a total 1024 words of memory.	Expand static memory in a minimum processor configuration.	Space on a 88-MCS card.	one slot
88-IMCS Full 1000 Word Static Memory Card	88-MCS Static Memory Card with full 1000 words of memory. See price list for discount price.			one slot
88-MCD 4K Dynamic Memory Card	This Dynamic Memory Card contains 4,096 words of memory. Maximum access time is 420 nanoseconds. An automatic refresh cycle is performed every 32 clock pulses at sync time. If the card is addressed at the same time that refresh occurs, the computer is given one or two wait states during refresh. Otherwise, the processor is unaware that refresh is occurring. Has write protect capability. Variable address circuitry allows user to provide a starting address in memory at any one of 16 locations—4K, 8K, 12K, 16K, etc.	Systems that require medium to large amounts of memory with fast access time.	none	one slot
88-DMAC Direct Memory Access Controller	This Direct Memory Access Controller will control 8 Dynamic Input/Output Cards. The controller generates a priority for each of the 8 cards and can generate either an interrupt or be sampled by the processor for job completion. Selects the channel to have access to the address buss and control buss when a DMA is to occur. Required in any system with DMA.	Systems that require rapid transfer of data into the CPU or out of the CPU. Allows for simplified software.	none	one slot
88-DMAE Direct Memory I/O Channel for External Devices	Full parallel Input/Output channel used for Direct Memory Access transfers between the processor and external devices. With one DMA I/O channel operating, data transfer rate is 300K bytes per second, while the processor continues to operate at approximately 80% speed.	Systems that require rapid transfer of data between the CPU memory and external devices. Also for slow speed, high quantity transfer.	88-DMAC	one slot
88-DMAI Direct Memory Access I/O Channel for Internal Transfers	Allows for high speed transfer of data blocks within the system's memory, without software intervention after set-up.	Data acquisition and logging systems.	88-DMAC	one slot
88-DISK Disk Drive	Consists of Pertex FD 400 floppy disk drive, power supply (110-125v AC, 60 Hz), cooling fan, disk buffer and address select electronics in Optima case similar to Altair Computer case. Capable of storing up to 300,000 words on a flexible disk. Disk included. Up to 16 disk drives can be controlled by one 88-DC Disk Controller.	Any application where mass memory is required.	88-DC	one slot



NAME & NUMBER	DESCRIPTION	APPLICATION	INTERFACE REQUIREMENT	SPACE REQUIREMENT
88-DC Disk Controller	The 88-DC Disk Controller consists of two circuit boards. It electronically sectors each track on the disk into eight groups of 512 words. (Each disk has 77 tracks). Capable of controlling up to 16 Disk Drives.	Any application where mass memory is required.	2 slots	1480
88-PROM PROM kit	Two bipolar 256 x 4 Shottky PROM's. Access time of 70 nanoseconds.	Control applications.	88-PPC PROM Programmer Card	42
88-PIO Parallel Input/Output Card	Full parallel input/output card with necessary handshake flags for conventional parallel interface. Contains all required addressing circuitry to allow each card to be addressed anywhere from location 0 to location 255. Both input and output data has their own 8 bit latch for buffering. Includes necessary logic to allow an adjacent channel to be a control channel. Thus, adjacent channel can be used to set up flags and also clear flags and interrupts.	Any application where data is available in parallel or the external interface requires parallel data.	has standard TTL drives & accepts standard TTL signals	one slot 92
88-SIOA Serial Input/Output Card RS232	Full RS232 interface card with signal compatibility to conventional RS232 interface. Uses a UART and has divider logic to allow for presettable baud rates from 110 to 19,200. Uses adjacent channel for control if desired. If the card was selected to have an address of 1, adjacent I/O channel 0 would be the control card for setting up the required flags.	Interfacing any conventional RS232 type peripherals	Conventional RS232	one slot 119
88-SIOB Serial Input/Output Card TTL	Same as 88-SIOA except all signals are TTL levels (both in and out).	transmission of data with serial format	Standard TTL signals	one slot 129
88-SIOC Serial Input/Output Card TTY	Same as 88-SIOA except that it is for interfacing with conventional teletypes.	interfacing to teletypes	Standard TTY signals	one slot 129
88-VI Vectored Interrupt	Gives user 8 levels of hardware vectored interrupt. Automatically establishes restart addresses for interrupts.	Any type of interrupt structured system. Especially useful in real time applications.	All MITS standard I/O channels have provisions to interface to vectored interrupt.	one slot 120
88-RTC Real Time Clock	Provides interrupts to the processor at user selected rate of once every 100 microseconds, 1000 microseconds, 10 milliseconds or 100 milliseconds.	Any real time system or data logging system	Requires Vectored Interrupt	fits on Vectored Interrupt card. 53
88-ACC Altair Cyclops Camera	Digital, solid state TV camera. 1024 elements in a 32 x 32 array. Each detector is capable of 16 gray levels and automatic electronic stops are adjustable by the software. Up to 16 cameras can be controlled by one Cyclops Controller. Multiple controllers can be used.	Computer with eyes such as an intrusion system, production line control, automatic inspection stations.	88-CCC Cyclops Controller Card	Camera is 2" x 3" x 8". 180
88-CCC Altair Cyclops Controller Card	Will support up to 16 cameras simultaneously. Contains buffer memory and all 8 stop controls to communicate with the camera. Provides all interfacing for Altair Cyclops Camera.			one slot 260



NAME & NUMBER	DESCRIPTION	APPLICATION	INTERFACE REQUIREMENT	SPACE REQUIREMENT
88-KB ASCII Keyboard	Keyboard and case. Contains all logic and debounce circuitry for 96 ASCII characters. Controller is contained in 88-32DU 32 Character Alpha-numeric Display.	Any application requiring alpha-numeric data.	88-32DU Alpha-numeric Display.	external cabinet 198
88-14ND 14 Digit Numeric Display	14 Digit Numeric Display mounted in its own case. Includes controller card.	Any application requiring numeric readout.		one slot plus external case
88-VLCT Low Cost Terminal	Allows user to convert from octal format to binary and back to octal, decimal, or hexadecimal.	Machine Language programming	88-PIO Parallel I/O	129
88-PPC PROM Programmer Card	Allows blocks of memory to be automatically programmed into Programmable Read Only Memories. The PROM's normally used in the Altair 8800 are bipolar Schottky PROM's with 70 nanosecond access time. Each PROM is organized as a 256 x 4 memory. Thus, two PROM's are required to achieve a 256 x 8 memory. Card includes external test socket for programming.	Particularly useful in control applications		one slot 324
88-32DU 32 Character Alpha-numeric Display	32 character alpha-numeric Burroughs Self-Scan display mounted in its own case. Includes controller with interface logic and power supply. Displays 64 ASCII characters and has 32 character memory.	Any application needing alpha-numeric display	none	1 slot plus external cabinet (may be mounted) 498
88-ACR Audio-Cassette Record Interface	Allows virtually unlimited memory storage for data or software. Operates by modulating audio frequencies in the record mode. Demodulates recorded data in play-back mode.	Connects to any medium quality cassette tape recorder		128
CT256 Computer Terminal	Basic memory of 256 characters with expandability to 1024 characters combines with a 32 character display to provide ease of operation. Special function keys for data retrieval and display format. ASCII coded keyboard and 110/300 baud rates. Auto-transmit and tape play/record features.	Computer terminal with Alpha-numeric display	88-SIOA Serial I/O	754
88-PPCB Prototype Printed Circuit Board	Double-sided, plated through board for designing custom interfaces to the Altair 8800. Includes 5 volt regulator and associated filters.	Developing Custom Interfaces	Defined by user	one slot 57
88-EC Expander Board	Expander Board comes with space for four edge connector sockets to allow for the addition of four cards to the Altair 8800. The Altair comes with one Expander Board. Three additional boards can be added, making provisions for 16 cards. Expander Chassis needed for additional expansion.	Expand the 8800	Space in Altair 8800 chassis or Expander chassis	16
88-EXC Extender Card	Double-sided circuit board with edge connector to allow all cards on the buss to be extended out of the card rack for easy maintenance.	Where extensive development or maintenance is anticipated		57
Cases	A wide assortment of cases is available for adding external devices.			
88-EBC Expander Board Chassis	Power supply, Optima cabinet and four Expander Cards allows for an expansion of 16 cards to the Altair 8800. All necessary interface logic included.	Expanded system	One slot in basic Altair	8" rack space 349



**ALTAIR 8800****◆◆◆◆◆ PROCESSOR DESCRIPTION ◆◆◆◆◆**

Processor: 8 bit parallel  
Max. memory: 65,000 words (all directly addressable)  
Instruction cycle time: 2 microseconds  
Inputs and outputs: 256 (all directly addressable)  
Number of basic machine instructions:  
    78 (181 with variants)  
Add/subtract time: 2 microseconds  
Number of subroutine levels: 65,000  
Interrupt structure: 8 hardwire vectored levels plus  
    software levels  
Number of auxiliary registers: 8 plus stack pointer,  
    program counter and accumulator  
Memory type: semiconductor (dynamic or static  
    RAM, ROM, PROM)  
Memory access time: 850 ns static RAM;  
    420 or 150 ns dynamic RAM



# INSTRUCTION SET

## Summary of Processor Instructions

Mnemonic	Description	Instruction Code <sup>[1]</sup>									Clock <sup>[2]</sup>
		D <sub>7</sub>	D <sub>6</sub>	D <sub>5</sub>	D <sub>4</sub>	D <sub>3</sub>	D <sub>2</sub>	D <sub>1</sub>	D <sub>0</sub>	Cycles	
MOV <sub>r1, r2</sub>	Move register to register	0	1	D	D	S	S	S		5	
MOV <sub>M, r</sub>	Move register to memory	0	1	1	1	0	S	S	S	7	
MOV <sub>r, M</sub>	Move memory to register	0	1	D	D	D	1	1	0	7	
HLT	Halt	0	1	1	1	0	1	1	0	7	
MVI <sub>r</sub>	Move immediate register	0	0	D	D	D	1	1	0	7	
MVI <sub>M</sub>	Move immediate memory	0	0	1	1	0	1	1	0	10	
INR <sub>r</sub>	Increment register	0	0	D	D	D	1	0	0	5	
DCR <sub>r</sub>	Decrement register	0	0	D	D	D	1	0	1	5	
INR <sub>M</sub>	Increment memory	0	0	1	1	0	1	0	0	10	
DCR <sub>M</sub>	Decrement memory	0	0	1	1	0	1	0	1	10	
ADD <sub>r</sub>	Add register to A	1	0	0	0	0	S	S	S	4	
ADC <sub>r</sub>	Add register to A with carry	1	0	0	0	1	S	S	S	4	
SUB <sub>r</sub>	Subtract register from A	1	0	0	1	0	S	S	S	4	
SBB <sub>r</sub>	Subtract register from A with borrow	1	0	0	1	1	S	S	S	4	
ANA <sub>r</sub>	And register with A	1	0	1	0	0	S	S	S	4	
XRA <sub>r</sub>	Exclusive Or register with A	1	0	1	0	1	S	S	S	4	
ORA <sub>r</sub>	Or register with A	1	0	1	1	0	S	S	S	4	
CMP <sub>r</sub>	Compare register with A	1	0	1	1	1	S	S	S	4	
ADD <sub>M</sub>	Add memory to A	1	0	0	0	0	1	1	0	7	
ADC <sub>M</sub>	Add memory to A with carry	1	0	0	0	1	1	1	0	7	
SUB <sub>M</sub>	Subtract memory from A	1	0	0	1	0	1	1	0	7	
SBB <sub>M</sub>	Subtract memory from A with borrow	1	0	0	1	1	1	1	0	7	
ANA <sub>M</sub>	And memory with A	1	0	1	0	0	1	1	0	7	
XRA <sub>M</sub>	Exclusive Or memory with A	1	0	1	0	1	1	1	0	7	
ORA <sub>M</sub>	Or memory with A	1	0	1	1	0	1	1	0	7	
CMP <sub>M</sub>	Compare memory with A	1	0	1	1	1	1	1	0	7	
ADI	Add immediate to A	1	1	0	0	0	1	1	0	7	
ACI	Add immediate to A with carry	1	1	0	0	1	1	1	0	7	
SUI	Subtract immediate from A	1	1	0	1	0	1	1	0	7	
SBI	Subtract immediate from A with borrow	1	1	0	1	1	1	1	0	7	
ANI	And immediate with A	1	1	1	0	0	1	1	0	7	
XRI	Exclusive Or immediate with A	1	1	1	0	1	1	1	0	7	
ORI	Or immediate with A	1	1	1	1	0	1	1	0	7	
CPI	Compare immediate with A	1	1	1	1	1	1	1	0	7	
RLC	Rotate A left	0	0	0	0	0	1	1	1	4	
RRC	Rotate A right	0	0	0	0	1	1	1	1	4	
RAL	Rotate A left through carry	0	0	0	1	0	1	1	1	4	
RAR	Rotate A right through carry	0	0	0	1	1	1	1	1	4	
JMP	Jump unconditional	1	1	0	0	0	0	1	1	10	
JC	Jump on carry	1	1	0	1	1	0	1	0	10	
JNC	Jump on no carry	1	1	0	1	0	0	1	0	10	
JZ	Jump on zero	1	1	0	0	1	0	1	0	10	
JNZ	Jump on no zero	1	1	0	0	0	0	1	0	10	
JP	Jump on positive	1	1	1	1	0	0	1	0	10	
JM	Jump on minus	1	1	1	1	1	0	1	0	10	
JPE	Jump on parity even	1	1	1	0	1	0	1	0	10	
JPO	Jump on parity odd	1	1	1	0	0	0	1	0	10	
CALL	Call unconditional	1	1	0	0	1	1	0	1	17	
CC	Call on carry	1	1	0	1	1	1	0	0	11/17	
CNC	Call on no carry	1	1	0	1	0	1	0	0	11/17	
CZ	Call on zero	1	1	0	0	1	1	0	0	11/17	
CNZ	Call on no zero	1	1	0	0	0	1	0	0	11/17	
CP	Call on positive	1	1	1	1	0	1	0	0	11/17	
CM	Call on minus	1	1	1	1	1	1	0	0	11/17	
CPE	Call on parity even	1	1	1	0	1	1	0	0	11/17	
CPO	Call on parity odd	1	1	1	0	0	1	0	0	11/17	
RET	Return	1	1	0	0	1	0	0	1	10	
RC	Return on carry	1	1	0	1	1	0	0	0	5/11	
RNC	Return on no carry	1	1	0	1	0	0	0	0	5/11	



Mnemonic	Description	Instruction Code <sup>[1]</sup>								Clock <sup>[2]</sup> Cycles
		D <sub>7</sub>	D <sub>6</sub>	D <sub>5</sub>	D <sub>4</sub>	D <sub>3</sub>	D <sub>2</sub>	D <sub>1</sub>	D <sub>0</sub>	
RZ	Return on zero	1	1	0	0	1	0	0	0	5/11
RNZ	Return on no zero	1	1	0	0	0	0	0	0	5/11
RP	Return on positive	1	1	1	1	0	0	0	0	5/11
RM	Return on minus	1	1	1	1	1	0	0	0	5/11
RPE	Return on parity even	1	1	1	0	1	0	0	0	5/11
RPO	Return on parity odd	1	1	1	0	0	0	0	0	5/11
RST	Restart	1	1	A	A	A	1	1	1	11
IN	Input	1	1	0	1	1	0	1	1	10
OUT	Output	1	1	0	1	0	0	1	1	10
LXI B	Load immediate register Pair B & C	0	0	0	0	0	0	0	1	10
LXI D	Load immediate register Pair D & E	0	0	0	1	0	0	0	1	10
LXI H	Load immediate register Pair H & L	0	0	1	0	0	0	0	1	10
LXI SP	Load immediate stack pointer	0	0	1	1	0	0	0	1	10
PUSH B	Push register Pair B & C on stack	1	1	0	0	0	1	0	1	11
PUSH D	Push register Pair D & E on stack	1	1	0	1	0	1	0	1	11
PUSH H	Push register Pair H & L on stack	1	1	1	0	0	1	0	1	11
PUSH PSW	Push A and Flags on stack	1	1	1	1	0	1	0	1	11
POP B	Pop register pair B & C off stack	1	1	0	0	0	0	0	1	10
POP D	Pop register pair D & E off stack	1	1	0	1	0	0	0	1	10
POP H	Pop register pair H & L off stack	1	1	1	0	0	0	0	1	10
POP PSW	Pop A and Flags off stack	1	1	1	1	0	0	0	1	10
STA	Store A direct	0	0	1	1	0	0	1	0	13
LDA	Load A direct	0	0	1	1	1	0	1	0	13
XCHG	Exchange D & E, H & L Registers	1	1	1	0	1	0	1	1	4
XTHL	Exchange top of stack, H & L	1	1	1	0	0	0	1	1	18
SPHL	H & L to stack pointer	1	1	1	1	1	0	0	1	5
PCHL	H & L to program counter	1	1	1	0	1	0	0	1	5
DAD B	Add B & C to H & L	0	0	0	0	1	0	0	1	10
DAD D	Add D & E to H & L	0	0	0	1	1	0	0	1	10
DAD H	Add H & L to H & L	0	0	1	0	1	0	0	1	10
DAD SP	Add stack pointer to H & L	0	0	1	1	1	0	0	1	10
STAX B	Store A indirect	0	0	0	0	0	0	1	0	7
STAX D	Store A indirect	0	0	0	1	0	0	1	0	7
LDAX B	Load A indirect	0	0	0	0	1	0	1	0	7
LDAX D	Load A indirect	0	0	0	1	1	0	1	0	7
INX B	Increment B & C registers	0	0	0	0	0	0	1	1	5
INX D	Increment D & E registers	0	0	0	1	0	0	1	1	5
INX H	Increment H & L registers	0	0	1	0	0	0	1	1	5
INX SP	Increment stack pointer	0	0	1	1	0	0	1	1	5
DCX B	Decrement B & C	0	0	0	0	1	0	1	1	5
DCX D	Decrement D & E	0	0	0	1	1	0	1	1	5
DCX H	Decrement H & L	0	0	1	0	1	0	1	1	5
DCX SP	Decrement stack pointer	0	0	1	1	1	0	1	1	5
CMA	Compliment A	0	0	1	0	1	1	1	1	4
STC	Set carry	0	0	1	1	0	1	1	1	4
CMC	Compliment carry	0	0	1	1	1	1	1	1	4
DAA	Decimal adjust A	0	0	1	0	0	1	1	1	4
SHLD	Store H & L direct	0	0	1	0	0	0	1	0	16
LHLD	Load H & L direct	0	0	1	0	1	0	1	0	16
EI	Enable Interrupts	1	1	1	1	1	0	1	1	4
DI	Disable interrupt	1	1	1	1	0	0	1	1	4
NOP	No-operation	0	0	0	0	0	0	0	0	4

NOTES: 1. DDS or SSS — 000 B — 001 C — 010

D — 011 E — 100 H — 101 L — 110 Memory — 111 A.

2. Two possible cycle times, (5/11) indicate instruction cycles dependent on condition flags.



# QUESTIONS AND ANSWERS

Already we have received 100's of questions from our customers about the Altair 8800 Computer, Altair Systems and Peripherals. The following section is designed to answer most of the common questions. If you have any additional questions, comments or thoughts related to the Altair 8800, please feel free to contact MITS at any time.

*How powerful is the Altair 8800 and how does it compare to other computers?*

The term "power" in a computer is related to a number of different items and it tends to be a nebulous measurement. In any case, the most easily identifiable performance criteria includes cycle speed, memory size and I/O capability. The basic cycle time of the MITS Altair 8800 is 2 microseconds; it can directly address 65,000 words (8 bit bytes); and it can connect to 256 input and 256 output devices. Its cycle time is comparable to most small computers on the market today (they range from .8 microseconds to several microseconds). As for memory size and I/O capability, the Altair 8800 beats the socks off most mini's. Most small computers can directly address 64 or fewer input/output channels and only 512 words of memory. An indirect connection to a base page is usually required for bigger memories.

*If the Altair 8800 has such great specifications, why is it so inexpensive?*

In developing the Altair 8800, MITS engineers made extensive use of large scale integrated circuit technology. This is the same technology that brought down the price of calculators. As we state in our ad literature, the secret of

the 8800 is the Intel 8080 processor chip. This one integrated circuit contains a complete 8-bit parallel central processing unit.

MITS was one of the first companies to manufacture high volume, low cost calculators. Our experience with large scale integrated circuits and volume production facilities has enabled us to build a computer at a very low cost.

*How does the quality of the Altair 8800 Computer compare with other computers?*

We'd like to stress that the low cost of the Altair 8800 was not achieved by compromising the quality. Quality wise, the Altair 8800 is as good as any other commercial computer that we are aware of. An illustration of this is the front panel indicator lamps. In most computers, these lamps are incandescent bulbs which burn out frequently. The Altair 8800 uses LED's which have an almost infinite life. The front panel switches are high quality, miniature toggle switches as opposed to slide switches and low cost rocker switches available on some processors. The circuit boards are all fiberglass plated boards and each card in the Altair System has its own power regulator. The case, which is made by Optima, is all aluminum construction complete with sub-chassis and a false front panel.

*How large a memory should I order with my Altair 8800 Computer?*

In general, this is a difficult question to answer. If you plan on using your Altair System for relatively simple control applications, the 256 words of static memory provided with System

One may prove to be adequate. Most control applications shouldn't take more than a few thousand words of memory. If you use your Altair 8800 for more sophisticated accounting and engineering applications, you will of course need a larger memory. The memory in these applications could go as high as 65,000 words. But, in the case of a user who does a large amount of software development in machine or assembly language, 8,000 words should be adequate.

Again, if you have any questions concerning a particular application, feel free to contact MITS for detailed information and specific suggestions.

*How simple is it to interface external devices to the Altair 8800 Computer?*

The Altair 8800 has been designed with a buss system that allows for relatively simple interfacing to external electronic equipment. Any electronics engineer or technician with a basic knowledge of logic design should be able to interface the Altair 8800 to external systems in a minimum amount of time. Consulting time for custom projects is available from MITS. Questions concerning specific design problems will be answered at no cost.

*I am not familiar with basic computer technology, but I do have a basic understanding of electronics. How long will it take me to become familiar enough with the Altair 8800 in order to interface it into a custom system?*

This too, is a difficult question. The average electronic engineer, technician, or hobbyist should be able to write



simple machine programming in a matter of a few hours after first being exposed to the *Altair*. The amount of time after that to actually generate an operating program, of course, will depend on how complex and how large the program is and will also be related to the creativity of the individual doing the programming.

Anyone with a basic amount of assembly language or machine language programming experience should be able to write programs for the computer almost instantly.

*I have done a considerable amount of computer programming, but I know almost nothing about electronics. How long will it take me to learn enough electronics to do my job?*

If *Altair 8800* standard interfaces are used, no knowledge of electronics is required in order to use the *Altair 8800*. This statement doesn't apply if you

want to design an electronic interface for some type of unique electronic device or electro-mechanical device. If desired, *MITS* will provide required engineering or software support for any project at a nominal cost.

*The literature I have read concerning small processors contains a large amount of information on using the computer as a control device for external electro-mechanical systems. Does this mean that small computers are incapable of doing business, accounting, and engineering calculations?*

Absolutely not. The main reason that small processors are closely associated with controllers is that the cost of the processor is low enough that it can be used as a system controller. For example, if you wanted to control a lathe with a computer, it's clear that a 3 million dollar computer installation wouldn't be a very good way to go. But, if we are talking about a computer system in the

1-2 thousand dollar range, then computer control becomes a very interesting application. The controller term is used frequently with small processors because the implications are overwhelming.

*What are the business opportunities for someone who would like to design custom systems using the Altair 8800?*

There are literally thousands of custom applications that require or could use a computer. We strongly encourage anyone interested in this sort of business opportunity to look into it in some depth.





# MIT'S ALTAIR 8800

## PRICE LIST

April 1, 1975

PART NUMBER	DESCRIPTION	KIT	ASSEM	DAYS DELIVERY
<u>Computers, Terminals &amp; Line Printer</u>				
*8800	Altair 8800 Computer	\$ 439.00	\$ 621.00	60
COMTER II.	Terminal w/Built in Audio Cassette I/O	780.00	920.00	60
CT-256	Comter 256 Terminal	745.00	885.00	45-60
CT-256	Comter 256 in Aluminum Suitcase	--	965.00	90
CT257, 8 or 9	Pages 2, 3 or 4 for CT-256	95.00	105.00	45-60
CT-8096	CRT Terminal	TBD	TBD	JUNE
88-VLCT	Low Cost Terminal	129.00	169.00	45-60
88-80LP	Line Printer & Controller. 110 char/sec	1,750.00	1,975.00	90
88-TTY	Teletype ACR-33	1,500.00	1,500.00	60-90
<u>Memory</u>				
88-MCS	256 words memory--Exp to 1K with 88-MM	103.00	134.00	60
88-MM	Adds 256 words to 88-MCS	53.00	61.00	60
88-1MCS	1K Static Memory	176.00	209.00	60
88-4MCD	4K Dynamic Memory	264.00	338.00	60
88-DCDD	Disc Controller. 1 Disc Drive & Multiplexer	1,480.00	1,980.00	60
88-DISC	Disc Drive in cabinet with added Multiplexer	1,180.00	1,600.00	60
88-DMAC	Direct Memory Access Controller	98.00	149.00	90
88-DMAE	Direct Memory I/O Channel--External	126.00	186.00	90
88-DMAI	Direct Memory I/O Channel--Internal	123.00	183.00	90
88-ACR	Audio Cassette Record Interface	128.00	174.00	60
<u>I/O and Expansion Devices</u>				
88-PIO	Parallel I/O	92.00	114.00	60
88-SIOA	Serial I/O RS-232 compatible	119.00	138.00	60
88-SIOB	Serial I/O--TTL	124.00	146.00	60
88-SIOC	Serial I/O--TTY	124.00	146.00	60
*88-EC	Expander Mother Board (adds 4 slots to 8800)	16.00	31.00	60
88-EBC	Expander Cabinet (add'l case, P/S, etc. for 16 slots)	394.00	485.00	60
88-EXC	Extender Card	57.00	83.00	60
<u>Miscellaneous</u>				
88-VI	Vectored Interrupt	126.00	179.00	60
88-RTC	Real Time Clock	53.00	84.00	60
88-ACC	Altair Cyclops Camera	180.00	235.00	90
88-CCC	Camera Controller Card	260.00	340.00	90
88-KB	ASCII Keyboard	198.00	254.00	60
88-32DU	32 char Alpha/Numeric Display	498.00	549.00	60
88-PPCB	Prototype P.C. Board	57.00	84.00	60
88-FAN	Cooling Fan	16.00	20.00	15
88-25DB	Pr. Connectors--1 each 7325-DB25P & S + cover	11.00	11.00	15
MS-416	MitScope--4 channel scope	127.00	189.00	
<u>PROM</u>				
88-PMC	PROM Memory Card	76.00	128.00	90
88-PROM	PROM'S	42.00	57.00	90
88-PPC	PROM Programmer Card	324.00	420.00	90



		KIT	ASSEM	DAYS DELIVERY
<u>Suggested Systems</u>				
System 6		—	\$5,297.00	90
I	ALTAIR Basic I	Price 2,393.00	2,886.00	60
		Less Discount -425.00	-425.00	
		YOUR COST 1,968.00	2,461.00	
II	ALTAIR Extended Basic II	Price 2,950.00	3,531.00	60
		Less Discount -725.00	-725.00	
		YOUR COST 2,225.00	2,806.00	
III	ALTAIR DOS/Basic III	Price 6,374.00	7,949.00	90
		Less Discount -1,300.00	-1,300.00	
		YOUR COST 5,074.00	6,649.00	
IV	ALTAIR Extended Engr/Acctg IV	Price 10,002.00	11,989.00	120
		Less Discount -1,500.00	-1,500.00	
		YOUR COST 8,502.00	10,489.00	

#### Software

#### With Minimum System:

Package 1	\$500.00	+ 8K memory, I/O	Free Binary (on tape \$30.00)
BASIC	500.00	+ 8K memory, I/O	\$ 75.00
EXT. BASIC	750.00	+ 12K memory, I/O	150.00
DOS	500.00	n/a	
User's Group	30.00/yr.	Free with 8800	
		(Foreign--add \$5.00 airmail postage)	

#### Miscellaneous Parts

(A)	3 Chip Package (Microprocessor & 2 memory)	\$250.00	—	10
(B)	Set 4 P.C. Boards			
	(1 ea. CPU, Exp., Memory & Front Panel)	73.00	—	30
(C)	P/N 88-CPU Complete CPU Board	310.00	360.00	60

#### \*\*Manuals - Terminal CT-256

Operators	\$ 6.50
Assembly	10.00
Theory of Operation, Schematics & Trouble Shooting	10.00

#### \*\*Manuals - Altair 8800 Computer

Operators	7.50
Assembly	9.00
Theory of Operation, Schematics & Trouble Shooting	9.00
One year up-date to theory manual	10.00

#### \*\*Manuals - Peripherals

Combination Operators & Assembly (each)	5.00
---	------

#### Postage & Terms

- Terms: Cash with order, Mastercharge or BankAmericard
- Postage & Handling:
  - 1) Add \$8.00 each for Terminal, Computer, Line Printer, Teletype and Disc
  - 2) Add for Peripherals:
    - (a) -0- if ordered with computer
    - (b) \$3.00 if ordered separately
  - 3) Add \$1.00 postage for Chip Package & P.C. Board Set
  - 4) Postage included in price of manuals
  - 5) Canada, Hawaii & Alaska, postage charges subject to quotation.

(\* )Note: Basic unit has 4 slots available, one of which is used up with CPU Board. When ordering more than 3 added peripherals, added 88-EC required for each 4 peripherals.

(\*\*) Note: Manuals are included at no cost with purchased units.

NOTE: Prices, specifications, development and delivery all subject to change without notice.



# mits presents **COMTER 256**



## **COMPUTER TERMINAL**

**THE COMTER 256 -- DESIGNED TO GIVE EVERYONE  
ACCESS TO THE SOPHISTICATED WORLD OF  
COMPUTERS.**

The Comter 256 is a surprisingly versatile computer terminal. It's basic memory of 256 characters with expandability to 1024 characters combines with a 32 character Self-Scan<sup>™</sup> display to provide ease of operation.

Data retrieval and display format is made flexible with the Comter's special function keys.

The Comter RS232 standard connector makes hardwiring as simple as plugging in a toaster. It's built-in acoustic coupler makes on-line operation (via the telephone) just as simple and saves extra cost.

The ASCII coded keyboard and 110/300 baud transmit/receive rate makes the 256 compatible with almost all systems today.

It's size and weight make it more portable and usable than bulky CRT units. The main case is just 14" wide by 11½" deep by 5" high. The

separate keyboard unit which adds to its convenience is 14" wide by 7½" deep by 2½" high. The combined weight of both units is a mere 15 lbs.

Power Consumption of the Comter is less than 50 watts.

The MITS Comter 256 also has a tape play/record feature that allows you to record any on-line data (via the telephone) for later off-line playback. This feature gives you virtually unlimited memory capability. Almost any type of tape recorder may be used.

The auto-transmit feature allows the operator to transmit data or program material to the computer line-by-line instead of typing it directly into the computer, saving computer time and your money.

The MITS Comter 256 is engineered to highest industry standards, and YOU can afford it for an extremely reasonable price.



## BULLETIN!

Here are the latest features to be included in the ALTAIR 8800 brochure.

### ALTAIR TIME PAYMENT PLAN (Kits Only)

	You Pay	You Receive
Month One	\$68.75	Assembly, Operators, Trouble-shooting and Theory of Operation manuals
Month Two	\$68.75	Power Supply (includes board and all components)
Month Three	\$68.75	Expander Card
Month Four	\$68.75	Case with hardware
Month Five	\$68.75	1K Static Memory Board with 256 words of memory
Month Six	\$68.75	CPU Board with all components except the processor chip
Month Seven	\$68.75	Control Board with all components
Month Eight	\$68.75	Processor chip
<b>Total</b>	<b>\$550.00</b>	

<b>Retail Price:</b> Altair 8800 Computer kit	\$439.00
1K Static Memory Card with 256 words of memory	103.00
Postage & Handling	8.00
	<b>\$550.00</b>

**Terms:** Cash with order (certified or cashiers check)\*  
BankAmericard or Master Charge  
All payments must be in increments of \$68.75 each

\*Personnel checks are OK except they must be cleared before a shipment can be made.

#### **Explanation:**

Although this plan does not allow you to receive the entire kit at one time, there are a number of advantages:

1. NO interest or financing charges.
2. Guaranteed price based on today's price.
3. NO penalties for either early or late payments\*
4. Free, immediate membership to the *Altair User's Club*.

\*If you send in an early payment we will make an early shipment. By the same token, a late payment will result in a late shipment. (After 60 days past due, the balance of the deal is cancelled. All payments must be made within 10 months.)

To get started, simply send in your first payment of \$68.75 (all payments must be exactly \$68.75). It will make processing faster if you note "Altair Time Payment Plan" on all payments, correspondence, etc.

Offer expires April 30, 1975.

### COUPON

**Altair Manuals--buy all three and save!**

This coupon entitles you to buy the Operators, Assembly, and Theory of Operation manuals for \$15.00, a savings of \$10.50.

(includes postage and handling)

For ease of handling the Altair manuals have been designed for three ring notebooks. Special Altair System Documentation notebooks can be purchased for \$4.50.

This offer good till May 30, 1975.

**NOTE:** Manual are free with purchase of an Altair. If you buy these manual and later buy an Altair, you will receive a complete set of updated manuals in an Altair notebook.

### SOFTWARE

**ALTAIR SOFTWARE PACKAGE ONE**—The first *Altair Software Package* is now available. It includes the following:

1. a resident assembler
2. text editor
3. system monitor

Cost of *Altair Software Package One* is \$500.00. However, a free binary listing will be sent to anyone who has purchased an *Altair Computer*, 8,000 words of memory and either a serial I/O board or an audio-cassette interface. *Software Package One* will also be available on either magnetic or paper tape for an additional copying fee of \$30.00.

### BASIC LANGUAGE NOW AVAILABLE!

#### SOFTWARE PACKAGE TWO:

##### BASIC Language System:

When purchased with an ALTAIR Computer, 8K memory and either a serial I/O board or an audio-cassette interface (no copy charge):

\$500.00

\$ 75.00

#### SOFTWARE PACKAGE THREE:

##### EXTENDED BASIC Language System:

When purchased with an ALTAIR Computer, 12K memory and either a serial I/O board or an audio-cassette interface (no copy charge):

\$750.00

\$150.00



# mits<sup>INC</sup><sup>®</sup>

## "Creative Electronics"

6328 Linn, N.E., Albuquerque, New Mexico 87108  
505/265-7553 Telex #660401

### POSTAGE PAID ORDER FORM

PLEASE TYPE OR PRINT

Name \_\_\_\_\_ Phone \_\_\_\_\_  
First Middle Initial Last

Street \_\_\_\_\_ Route \_\_\_\_\_ Box \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip code \_\_\_\_\_

SHIP TO ANOTHER ADDRESS: give directions here

Name \_\_\_\_\_ Phone \_\_\_\_\_  
First Middle Initial Last

Street \_\_\_\_\_ Route \_\_\_\_\_ Box \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip code \_\_\_\_\_

SPECIAL SHIPPING INSTRUCTIONS IF REQUIRED:

DATE \_\_\_\_\_ 19 \_\_\_\_\_

Do not write in this space

REC: \_\_\_\_\_

INV: \_\_\_\_\_

SHP: \_\_\_\_\_

NOTE - Remittance may safely be enclosed in this envelope

JUST FOLD AND SEAL - NO STAMP REQUIRED

**NO ENVELOPE NECESSARY**

DESCRIPTION	QUANTITY	PRICE EACH	TOTAL PRICE

Use this space for credit card purchases:

MASTERCARD \_\_\_\_\_ BANK AMERICARD \_\_\_\_\_

Sign name \_\_\_\_\_ amount \_\_\_\_\_

Print name \_\_\_\_\_

Exact card number \_\_\_\_\_ Inner Bank Code \_\_\_\_\_ Expires \_\_\_\_\_

Billing address: City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Postage, handling, and insurance, add the following amounts:

\$5 to \$25	\$1.00
\$26 to \$50	\$2.00
\$51 to \$75	\$3.00
\$76 to \$130	\$4.00
\$131 and over	\$5.00

\$5 is minimum order

Add postage for Air Mail or Special Delivery.

TOTAL FOR GOODS		
New Mexico Res. add 4% tax		
SHIPPING CHARGES		

TOTAL AMOUNT

CASH ORDER \$ \_\_\_\_\_

COD [min. \$50] \$ \_\_\_\_\_

25% Deposit. U.S. Post Office  
requires cash or certified check  
for balance.



DEALERS PLEASE USE PURCHASE ORDER  
FOR FASTER SERVICE, SEND MONEY ORDER OR CASHIER'S CHECK



**IMPORTANT**

BEFORE SEALING BE SURE THAT YOUR NAME AND  
ADDRESS ARE PLAINLY WRITTEN ON OTHER SIDE.

5

		6328 LINN, N.E., ALBUQUERQUE, NEW MEXICO 87108
		postage will be paid by
BUSINESS REPLY MAIL		no postage necessary if mailed in the United States
FIRST CLASS	permit no. 2114	Albuquerque, N.M.

**ORDER FORM INSIDE**